THERMAL RELIEF VALVE

ART. 42415



Function

Thermal discharge valve, with positive action and integrated replenishment. Thermal discharge valve with two independent sensors. In the event that one thermal measurement fails, the functionality of the valve is always guaranteed.

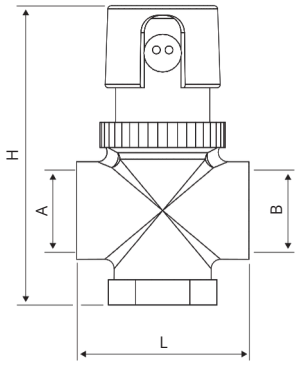

COD.	DN	A	B	L	H
50705060	20	3/4 F	3/4 F	65	95

- Max operating pressure: 6 bar
- Max operating temperature: 110°C
- Temperature range: 5°C / 50°C
- Ambient temperature range: 1°C / 50°C
- Set point temperature: 100°C (0°C / -5°C)
- Discharge flow at Δp of 1 bar and T=110°C: 1600 l/h
- Capillary length: 1.30 m (also available in 4 m)
- Double bulb