



SEPARATOR 125 MINI

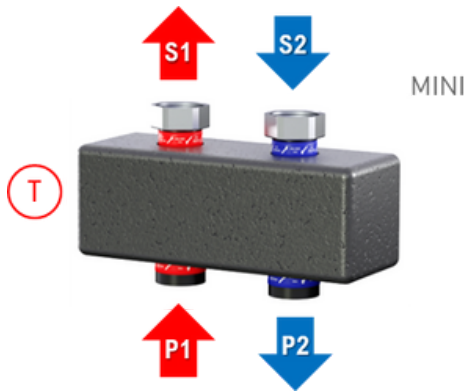


Hydraulic separation of the primary circuit from the secondary circuit; Compact MINI version.

Compatible with the entire range of HPS and NOVAHEAT units and HPS 90 units, DN20 DN25 DN32.

Technical data

Maximum mini flow rate	2 m ³ /h
Secondary center distance	125 mm
Insulation	EPP 25 mm
Maximum operating pressure	6 bar
Maximum temperature	110 °C
Chamber materials	Steel
S1 secondary supply	1" 1/2 F coupling nut
S2 secondary return	
P1 primary supply	1" 1/2 M
P2 primary return	
T side connection	1/2" F

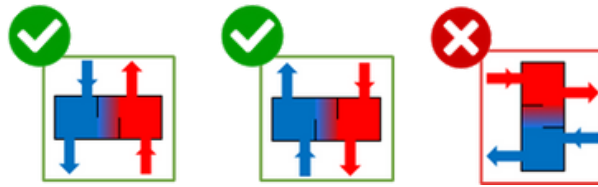

Complete with insulation

Number of available secondary circuits: 1 circuit *



Pressure-tested and painted

With anti-noise rubber damper

Intermediate insulation in EPP included

*For connection to the pump unit, the adapter connection kit is available

Dimensions

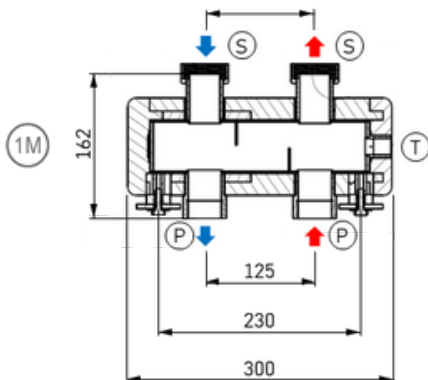

Circuits	(1S)	(1M)
S	1" 1/2 F coupling nut	
P	1" 1/4 F	
T	1/2" F	